

CANYON RIDGE[®]

garage doors



America's Favorite Garage Doors[®]

CARRIAGE HOUSE ■ CHEVRON ■ LOUVER ■ MODERN ■ ELEMENTS



*Canyon Ridge[®] / Carriage House 5-Layer, Design 13; Shown Custom Painted with Mahogany Cladding, Mahogany Overlays and REC14 Window Design
Photo Credit: Lauren Armellini Pillich*



*Canyon Ridge® / Louver, Design 52; Shown in Walnut Finish with Louver Mahogany Cladding, Mahogany Overlays and REC11 Window Design
Photo Credit: Andy Frame Photography*



COMPOSITE OVERLAY

The Look of Wood Without the Upkeep

For homeowners who want the look of wood without the upkeep, composite overlay doors are an excellent choice. Our faux-wood doors are constructed with an insulated steel base door for strength and durability and topped with a moisture-resistant composite overlay molded from natural wood boards. This gives the doors their realistic grain patterns and textures while keeping them low-maintenance. Like wood, the doors can be painted, and in most instances, stained, for a look that is distinctly yours.



CARRIAGE HOUSE
5-LAYER



CHEVRON



LOUVER



CARRIAGE HOUSE
4-LAYER



MODERN



ELEMENTS

*Canyon Ridge® / Louver, Design 52; Shown Custom Painted in Sherwin-Williams SW 2739
Charcoal Blue with Louver Mahogany Cladding, Mahogany Overlays and REC14 Window Design
Photo Credit: Andy Frame Photography*

versatile COASTAL CHARM

CANYON RIDGE® Louver

If you use more than one adjective to describe your home's style, we have the perfect transitional garage door for you. Versatile and unique, plantation style Canyon Ridge® Louver doors are a perfect complement to coastal cottages and colonial homes. They can also be a standout piece on traditional exteriors or modern farmhouses. Whatever your style, these doors add "wow" factor to your home. As with all Canyon Ridge doors, they are constructed with a durable, insulated steel core topped with horizontal faux-wood composite "slats". The result is a low-maintenance door with dimension and flair.



- 1 COMPOSITE OVERLAY
- 2 COMPOSITE CLADDING
- 3 STEEL
- 4 2" INTELLICORE® POLYURETHANE INSULATION
- 5 STEEL



STYLE AND CONSTRUCTION

- 4 or 5-layer faux-wood louver doors with Intellipore® polyurethane insulation. R-values from 18.4 to 20.4.
- Insulated glass styles include clear, frosted, seeded, rain and obscure. See page 16 for details.
- Removable clip-in window grilles for easy cleaning.
- Spade lift handles and step plates included. See page 17 for more options.


Calculated door section R-value is in accordance with DASMA TDS-163. Canyon Ridge® doors not applicable for new construction in California areas designated as "Fire Hazard Severity Zones".

DOOR DESIGNS

SERIES 4



SERIES 5

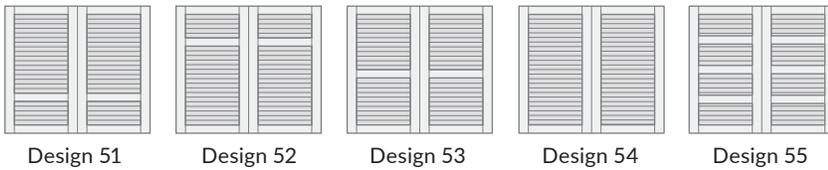

MATERIAL DESIGN OPTIONS

CLADDING/STEEL BASE



OVERLAY



Note: Composite cladding and overlay material options may be mixed and matched.

COLORS



* Dark Finish not available as a base steel color on Designs 41, 42, 43, 44, 45, 46 and 47.


† Bronze, Charcoal, Black and White Finish available only on Mahogany cladding and overlays.

Doors can be ordered primed for custom field painting. Note: Primed solid steel base is brown. Overlay stain color may vary due to finishing process.

Two-tone doors are available. To see all options go to: dis.clopay.com.


Steel surfaces have woodgrain texture. Due to the printing process, colors may vary. Order free color samples at clopaydoor.com/requestcolorssamples.

WINDOWS/TOP SECTIONS

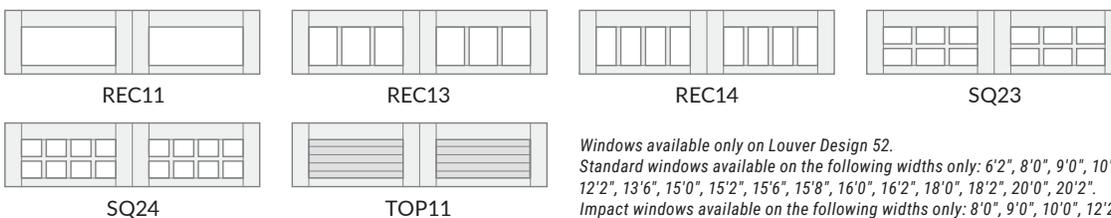

Windows available only on Louver Design 52.
Standard windows available on the following widths only: 6'2", 8'0", 9'0", 10'0", 10'2", 12'0", 12'2", 13'6", 15'0", 15'2", 15'6", 15'8", 16'0", 16'2", 18'0", 18'2", 20'0", 20'2".
Impact windows available on the following widths only: 8'0", 9'0", 10'0", 12'2", 16'2", 18'2".

SPECIALTY GLASS

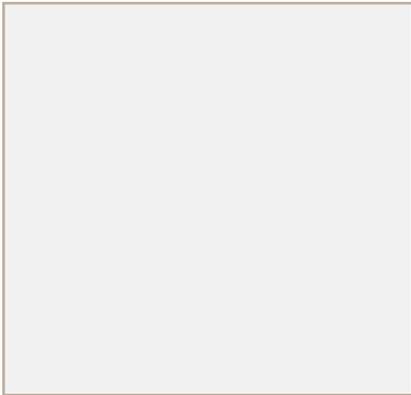

Clear



Frosted



Seeded*



Obscure



Rain


**Seeded is not available on Canyon Ridge® Modern window options.*

Canyon Ridge® Elements is not available with insulated glass options.

Additional charges for optional glass apply.

DECORATIVE HARDWARE

Attractive black powder coated handles and step plates are provided standard to further enhance the Canyon Ridge® Design. Optional decorative hardware – including handles, operable L-keylocks and strap hinges, is also available.



** Door may not open properly if installed near the top depending on opening dimensions and lift type.*

Aluminum Grip Handles are available in the following colors: Clear Aluminum (Anodized), Standard White (Painted), Bronze (Painted), Bronze (Anodized), Black (Anodized) and Dark Bronze (Anodized).



CUSTOM PAINT PROGRAM

Color Blast® offers more than 1,500 Sherwin-Williams® color options to complement your home. Clopay's durable two-part paint system has been thoroughly tested and is backed by a five-year warranty.





*Canyon Ridge® / Carriage House 5-Layer, Design 11;
Shown Custom Painted with Mahogany Cladding,
Mahogany Overlays and REC14 Window Design*



DESIGNING YOUR DOOR

Use the information below to select the appropriate model number.

CANYON RIDGE® CARRIAGE HOUSE 5-LAYER

Canyon Ridge Door Insulation Thickness Design Cladding Material Overlay Material Window Design/Top Section

CAN 2 13 P C REC13

CANYON RIDGE® CARRIAGE HOUSE 4-LAYER

Canyon Ridge Door Insulation Thickness Design Cladding Material (Does Not Apply) Overlay Material Window Design/Top Section

CAN 2 34 N C TOP11

CANYON RIDGE® ELEMENTS

Canyon Ridge Door Insulation Thickness Design Overlay Material Window Design/Top Section

CED 1 22 RS ARCH1

CANYON RIDGE® CHEVRON

Canyon Ridge Door Insulation Thickness Design Cladding Design Cladding Material Overlay Material Window Design/Top Section

CAN 2 11 V M M REC14

CANYON RIDGE® LOUVER

Canyon Ridge Door Insulation Thickness Design Cladding Material Overlay Material Window Design/Top Section

CAN 2 52 L M SQ24

CANYON RIDGE® MODERN

PLANK DESIGN

Canyon Ridge Door Insulation Thickness Cladding Material Design

CRM 2 C 6

METAL (ALUMINUM) INLAY DESIGN

Canyon Ridge Door Insulation Thickness Cladding Material Design

CRM 2 M AI

FULL-VIEW DESIGN

Canyon Ridge Door Insulation Thickness Overlay Material Design

CRM 2 C OV

ORDERING CODE KEY TERMS:

2 = 2" Polyurethane Insulation
 1 = 1-3/8" Polystyrene Insulation
 P = Pecky Cypress
 C = Clear Cypress
 L = Louver Mahogany
 M = Mahogany
 N = No Cladding
 RS = Woodgrain Classic

DESIGN CONSIDERATIONS

- Two-tone color options available. To view all options, visit: dis.clopay.com.
- Custom designs available. See your Clopay Dealer for more information.
- Attractive beveled edge, clip-in window grilles are removable for easy cleaning.
- Replaceable vinyl bottom weatherseal in a corrosion-resistant retainer helps seal out the elements.
- 10-ball nylon rollers for quiet operation.
- Heavy-duty 14 gauge steel hinges for long-lasting performance.
- Clopay's Safe-T-Bracket® prevents serious injury that could occur if the bottom bracket were removed with the garage door closed and under tension.
- WindCode® built-in door reinforcement available for high wind load applications. Learn more at: www.clopaydoor.com/residential/windcode-residential-information.
- Canyon Ridge® garage doors are not applicable for new construction in California areas designated as "Fire Hazard Severity Zones".

FINISHING AND CARE

Proper care and maintenance are imperative for long-term performance and appearance of Canyon Ridge® garage doors. Periodic inspection and maintenance of the composite cladding and overlays are required. Minor expansion and contraction is normal for exterior building materials exposed to direct sunlight and is not considered a defect. Complete finishing and maintenance instructions are provided with the door and are also available from your Clopay Dealer or online at www.clopaydoor.com.

ENVIRONMENTAL ASSURANCE

Clopay doors are compliant with environmental laws and regulations and do not contain HFCs.

- California SB 1013
- New Jersey A-5583/S-3919 – Greenhouse Gas Bill
- Washington HB 1112 – Hydrofluorocarbon Greenhouse Gas Emissions
- Canadian regulations amending the ozone-depleting substances and halocarbon alternatives regulations
- Product complies with 2015 IECC air infiltration requirement of 0.40 cfm/ft² or less (IECC, Section C402.5.2)



Visit [clopaydoor.com](https://www.clopaydoor.com) or call 1-800-2CLOPAY (225-6729) for more information on Clopay, America's Favorite Garage Doors.

Follow us on



MADE IN USA

©2024 Clopay Corporation. All rights reserved.

RSDR-CANYONRIDGEBR-20_REV0824



START DESIGNING
 YOUR NEW
 GARAGE DOOR
 OPEN CAMERA
 AND POINT!